


TRANSPORTER® HOT TAR & ASPHALT

Transporter Hot Tar and Asphalt hose has been designed to handle the transfer of hot asphaltic materials between trucks, rail transport cars, storage tanks and disposing units. The specially compounded CR tube and cover are exceptionally heat resistant (tube to +350°F) as well as being strong and durable. The spiral synthetic cord and helical wire reinforcement allow this hose to work at 150 psi.

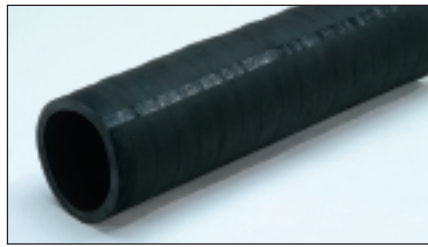

| |
|--|
| Resistance: |
| |
| Branding: |
| Thermoid HBD Industries Hot Tar & Asphalt 150 WP 350°F Max. Temp. Made In USA |

- Cover Color:** Black
- Oil Resistance:** Medium
- Construction:**
 - Tube:** CR, suitable to +350°F
 - Cover:** CR
 - Reinforcement:** Spiral synthetic cord with spiral helix(es) inserted
- Temperature Range:** -20°F to +350°F
-29°C to +177°C
- Packaging:** 100 ft. maximum
Minimum order is 1200 ft. per size

| Product Number | Nominal I.D. | | Nominal O.D. | | Reinforcement Spirals | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|--------|--------------|--------|-----------------------|------------------|-------|------------------|--------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 17771515002▲ | 1-1/2 | 38.10 | 2.13 | 53.98 | 2 | 150 | 1.03 | 6.00 | 152.40 | 1.30 | 1.93 |
| 17771520002 | 2 | 50.80 | 2.63 | 66.68 | 2 | 150 | 1.03 | 8.00 | 203.20 | 1.50 | 2.23 |
| 17771525002▲ | 2-1/2 | 63.50 | 3.19 | 80.96 | 2 | 150 | 1.03 | 10.00 | 254.00 | 2.30 | 3.42 |
| 17771530002 | 3 | 76.20 | 3.75 | 95.25 | 2 | 150 | 1.03 | 14.00 | 355.60 | 2.80 | 4.17 |
| 17771540002▲ | 4 | 101.60 | 4.75 | 120.65 | 2 | 150 | 1.03 | 18.00 | 457.20 | 4.00 | 5.95 |

▲ = Make To Order (MTO)

ELEPHANT TRUNK

The recommended use for Elephant Trunk hose is for gravity flow transfer of dry bulk materials. This hose features SBR/NR tube and SBR/EPDM cover compound with a two ply nylon cord reinforcement. This combination allows this hose to be lightweight and flexible. Other benefits include resistance to moisture absorption, weathering, aging and sun-checking.



| |
|--------------------|
| Resistance: |
| |
| Branding: |
| HBD Industries |

- Cover Color:** Black
- Oil Resistance:** Limited
- Construction:**
 - Tube:** SBR/NR - 1/8" thick
 - Cover:** SBR/EPDM - 1/32" thick
 - Reinforcement:** Nylon cord
- Temperature Range:** -40°F to +160°F
-40°C to +71°C
- Packaging:** 50 ft. maximum
Hand built – \$250.00 minimum order per size
Straight ends

| Product Number | Nominal I.D. | | Nominal O.D. | | Plies | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|--------|--------------|--------|-------|------------------|-------|------------------|------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 11474600502▲ | 4 | 101.60 | 4.44 | 112.71 | 2 | 15 | 0.10 | n/a | n/a | 1.60 | 2.38 |
| 11474602502▲ | 5 | 127.00 | 5.44 | 138.11 | 2 | 15 | 0.10 | n/a | n/a | 1.90 | 2.83 |
| 11474603502▲ | 6 | 152.40 | 6.44 | 163.51 | 2 | 15 | 0.10 | n/a | n/a | 2.30 | 3.42 |
| 11474604502▲ | 6-5/8 | 168.28 | 7.06 | 179.39 | 2 | 15 | 0.10 | n/a | n/a | 2.50 | 3.72 |
| 11474605502▲ | 8 | 203.20 | 8.44 | 214.31 | 2 | 15 | 0.10 | n/a | n/a | 3.00 | 4.46 |
| 11474606502▲ | 8-5/8 | 219.08 | 9.06 | 230.19 | 2 | 15 | 0.10 | n/a | n/a | 3.30 | 4.91 |
| 11474607502▲ | 10 | 254.00 | 10.44 | 265.11 | 2 | 15 | 0.10 | n/a | n/a | 3.70 | 5.51 |
| 11474608502▲ | 10-3/4 | 273.05 | 11.19 | 284.16 | 2 | 15 | 0.10 | n/a | n/a | 4.00 | 5.95 |
| 11474609502▲ | 12 | 304.80 | 12.44 | 315.91 | 2 | 15 | 0.10 | n/a | n/a | 4.50 | 6.70 |
| 11474610502▲ | 12-3/4 | 323.85 | 13.19 | 331.79 | 2 | 15 | 0.10 | n/a | n/a | 4.80 | 7.14 |
| 11474612502▲ | 14 | 355.60 | 14.44 | 366.71 | 2 | 15 | 0.10 | n/a | n/a | 5.40 | 8.04 |
| 11474614502▲ | 16 | 406.40 | 16.44 | 417.51 | 2 | 15 | 0.10 | n/a | n/a | 6.20 | 9.23 |
| 11474618502▲ | 18 | 457.20 | 18.44 | 468.31 | 2 | 15 | 0.10 | n/a | n/a | 7.00 | 10.42 |
| 11474619502▲ | 20 | 508.00 | 20.44 | 519.11 | 2 | 15 | 0.10 | n/a | n/a | 7.70 | 10.72 |
| 11474620502▲ | 24 | 609.60 | 24.56 | 623.89 | 2 | 15 | 0.10 | n/a | n/a | 9.30 | 13.84 |
| 11474621502▲ | 26 | 660.40 | 26.44 | 671.51 | 2 | 15 | 0.10 | n/a | n/a | 10.00 | 14.88 |

▲ = Make To Order (MTO)
n/a = Not Applicable

Product information is subject to change. For full details, visit our website or contact Customer Service.

FLIGHTMASTER® AIRCRAFT REFUELING

Flightmaster Aircraft Refueling hose is recommended for fueling or defueling commercial or private aircraft with jet fuel or aviation gasoline. This hose has been engineered to meet the API 1529, 1998 Grade 2, Type C; EN 1361/1997 Type C and NFPA 407, 2001 specifications.



Resistance:



Branding:

- EN 1361/1997/C Size-20-NFPA 407/2001 Month Year Serial Number
- HBD Industries Flightmaster Aircraft Refueling Hose API 1529/1998 Grade 2 Type C 300 PSI (2000 Kilopascal) WP

| | |
|---------------------------|---|
| Cover Color: | Black |
| Oil Resistance: | High |
| Construction: | |
| Tube: | NBR |
| Cover: | CR, static dissipating |
| Reinforcement: | 2-ply cord for 1" and 1-1/4" I.D. 4-ply cord for 1-1/2" to 4" I.D. |
| Temperature Range: | -22°F to +131°F -30°C to +55°C |
| Packaging: | Make to Order (MTO), 1200 ft. minimum Coupled lengths available, maximum is 100 ft. Contact Salisbury for details |

| Product Number | Nominal I.D. | | Nominal O.D. | | Plies | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|--------|--------------|--------|-------|------------------|-------|------------------|--------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 17815990002 | 1 | 25.40 | 1.56 | 39.69 | 2 | 300 | 2.07 | 4.50 | 114.30 | 0.69 | 1.03 |
| 17815992002 | 1-1/4 | 31.75 | 1.81 | 46.04 | 2 | 300 | 2.07 | 5.50 | 139.70 | 0.81 | 1.21 |
| 17815994002 | 1-1/2 | 38.10 | 2.13 | 53.98 | 4 | 300 | 2.07 | 7.00 | 177.80 | 1.16 | 1.73 |
| 17815993002 | 2 | 50.80 | 2.63 | 66.68 | 4 | 300 | 2.07 | 8.50 | 215.90 | 1.37 | 2.04 |
| 17815998002 | 2-1/2 | 63.50 | 3.22 | 81.76 | 4 | 300 | 2.07 | 12.00 | 304.80 | 1.88 | 2.80 |
| 17815999002 | 3 | 76.20 | 3.75 | 95.25 | 4 | 300 | 2.07 | 15.00 | 381.00 | 2.12 | 3.15 |
| 17816000002▲ | 4 | 101.60 | 4.75 | 120.65 | 4 | 300 | 2.07 | 30.00 | 762.00 | 2.86 | 4.26 |

▲ = Make To Order (MTO)

* Test pressuring is a 2:1 ratio with working pressure

Non-Reattachable Brass Couplings

| Product Number Male | Product Number Female | Hose I.D. |
|---------------------|-----------------------|-----------|
| 17949040001 | 17949041001 | 1 |
| 17949046001 | 17949047001 | 1-1/4 |
| 17949051001 | 17949052001 | 1-1/2 |
| 17949057001 | 17949058001 | 2 |
| 17949063001 | 17949064001 | 2-1/2 |
| 17949071001 | 17949072001 | 3 |
| 17949081001▲ | N/A | 4 |

▲ = Make To Order (MTO)

FLIGHTMASTER® JAC RISOR

Flightmaster Jac Risor hose is recommended for the application(s) of a flexible connector used on a risor platform for refueling trucks. The construction of this hose meets NFPA 407, 2001 specifications.



| | |
|--------------------|--|
| Resistance: | |
| Branding: | HBD Industries Jac Risor Aircraft Refueling Hose NFPA 407/2001 300 PSI (2000 Kilopascal) WP Quarter Year Serial Number |

- Cover Color:** Black
- Oil Resistance:** High
- Construction:**
 - Tube:** NBR
 - Cover:** CR, static dissipating
 - Reinforcement:** Four synthetic plies with a dual wire helix(es)
- Temperature Range:** -22°F to +131°F
-30°C to +55°C
- Packaging:** Make to Order (MTO), 500 ft. minimum
Coupled lengths available, maximum is 100 ft.

| Product Number | Nominal I.D. | | Nominal O.D. | | Plies | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|--------|--------------|--------|-------|------------------|-------|------------------|--------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 17816053002▲ | 3 | 76.20 | 3.94 | 100.01 | 4 | 300 | 2.07 | 15.00 | 381.00 | 3.10 | 4.61 |
| 17816011002▲ | 4 | 101.60 | 4.94 | 125.41 | 4 | 300 | 2.07 | 20.00 | 508.00 | 4.10 | 6.10 |

▲ = Make To Order (MTO)

FURNACE DOOR (Wire Braid)

Furnace Door hose is used as a water cooling hose on open hearth steel mill furnaces. This hose is so light and flexible, only one person is required when changing out this hose. Furnace Door hose features reinforcement braids of high-tensile carbon steel wire with a heat resistant textile layer. This combination provides an insulating layer against severe external heat. The flexible braid of stainless steel used for the cover of this hose is designed to prevent the build-up of metal spattering. This cover also resists the tendency for molten metal to cling to the hose.



| | |
|--------------------|--------------------------------|
| Resistance: | |
| Branding: | Furnace Door WP Made In USA |

- Cover Color:** Black
- Oil Resistance:** Limited
- Construction:**
 - Tube:** EPDM
 - Cover:** Flexible braid of stainless steel wire
 - Reinforcement:** One braid of high-tensile carbon steel wire
- Temperature Range:** -40°F to +600°F
-40°C to +315°C
With cooling water flowing through the hose at a velocity of 20 feet per second
- Packaging:** 50 ft. maximum, all lengths.
Minimum order is 500 ft. per size

| Product Number | Nominal I.D. | | Nominal O.D. | | Reinforcement Braids | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|-------|--------------|-------|----------------------|------------------|-------|------------------|--------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 01164461502▲ | 1 | 25.40 | 1.69 | 42.86 | 3 | 250 | 1.72 | 8.00 | 203.20 | 0.61 | 0.91 |
| 01164462502 | 1-1/4 | 31.75 | 1.88 | 47.63 | 3 | 250 | 1.72 | 10.00 | 254.00 | 0.80 | 1.19 |
| 01164463502 | 1-1/2 | 38.10 | 2.13 | 53.98 | 3 | 250 | 1.72 | 12.00 | 304.80 | 0.95 | 1.41 |
| 01164464502 | 2 | 50.80 | 2.63 | 66.68 | 3 | 250 | 1.72 | 16.00 | 406.40 | 1.20 | 1.79 |

▲ = Make To Order (MTO)

Product information is subject to change. For full details, visit our website or contact Customer Service.

HIGHFLEX GRADE D ROTARY DRILLING

Highflex hose is recommended for the high pressure rotary drilling requirements of API Spec 7K and ISO 6807. This hose is also used in higher pressure applications which exceed the capabilities of Grade C Rotary Drilling hose. It can also be used for the flexible connection between standpipe and swivel for pumping mud at very high pressure in oil drilling and exploration. The Highflex Grade D Rotary Drilling hose features multiple plies of high strength bead wire reinforcement to exceed the minimum burst requirements of 12,500 psig, yet provide for the maximum hose flexibility. The CR cover and NBR tube offer excellent resistance to heat, oil, abrasion and weather.



Resistance:



Branding:

HBD Industries, Inc.
Highflex Rotary-(month)-(Year)
5000 psig W.P.-Grade D-Made In USA
+ Warning: Caution Statement


| | |
|---------------------------|---|
| Cover Color: | Black |
| Oil Resistance: | High |
| Construction: | |
| Tube: | NBR, RMA Class A |
| Cover: | CR, Class C |
| Reinforcement: | Multiple plies of bead wire (8 or 10) and synthetic cord fabric |
| Temperature Range: | -20°F to +200°F -29°C to +93°C |
| Packaging: | Lengths over 30 ft. shipped on metal reels Shorter pieces shipped straight – slat packed |
| Couplings: | Only uncoupled hose is available at this time |

| Product Number | Nominal I.D. | | Nominal O.D. | | Plies | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|-------|--------------|--------|-------|------------------|-------|------------------|---------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 34844473002▲ | 2-1/2 | 63.50 | 4.25 | 107.95 | 8 | 5000 | 34.48 | 48.00 | 1219.20 | 11.30 | 16.82 |
| 34844475002▲ | 3 | 76.20 | 4.72 | 119.86 | 8 | 5000 | 34.48 | 48.00 | 1219.20 | 12.40 | 18.45 |
| 34844478002▲ | 3-1/2 | 88.90 | 5.44 | 138.11 | 10 | 5000 | 34.48 | 54.00 | 1371.60 | 17.43 | 25.94 |

▲ = Make To Order (MTO)

THERMOID MUD PUMP SUCTION

Thermoid Mud Pump Suction hose is designed to be used as the flexible connection between mud pits and slush pumps. This hose features a construction of multiple plies of synthetic cord fabric with a helical steel wire. This allows the hose to be flexible, helps prevent collapse and gives it a **full vacuum rating**. The CR cover and tube are resistant to abrasion, sunlight, weather and oil.

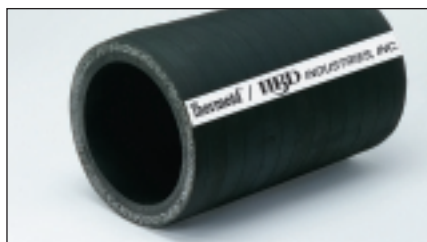

Resistance:



Branding:

Thermoid HBD Industries Inc.
Made In USA


| | |
|---------------------------|--|
| Cover Color: | Black |
| Oil Resistance: | Medium |
| Construction: | |
| Tube: | CR |
| Cover: | CR |
| Reinforcement: | Multiple plies of synthetic cord fabric with a helical wire |
| Temperature Range: | -30°F to +200°F -34°C to +93°C |
| Packaging: | 50 ft. maximum Hand built – \$250.00 minimum order per size |
| Couplings: | Built-in nipples |

| Product Number | Nominal I.D. | | Nominal O.D. | | Plies | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|--------|--------------|--------|-------|------------------|-------|------------------|---------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 11560006002▲ | 6 | 152.40 | 7.50 | 190.50 | 3 | 100 | 0.69 | 36.00 | 914.40 | 9.70 | 14.44 |
| 11560008002▲ | 8 | 203.20 | 9.63 | 244.48 | 4 | 100 | 0.69 | 48.00 | 1219.20 | 15.90 | 23.66 |
| 11560010002▲ | 10 | 254.00 | 11.75 | 298.45 | 5 | 100 | 0.69 | 60.00 | 1524.00 | 22.00 | 32.74 |
| 11560012002▲ | 12 | 304.80 | 13.88 | 352.43 | 6 | 100 | 0.69 | 72.00 | 1828.80 | 28.30 | 42.12 |

▲ = Make To Order (MTO)

HIGHFLEX GRADE C ROTARY VIBRATOR DRILLING & DECOKER

Highflex Decoker hose is the product you need for the application of the flexible connection between standpipe and swivel for pumping mud at a very high pressure in oil drilling and exploration. This is also the hose for refinery decoker service when coupled with Highflex Full Flow Couplings. This hose features high strength spiral steel wire reinforcement which provides very flexible connection capable of withstanding high pumping pressures. The CR cover and NBR tube offer excellent resistance to heat, oil, drilling muds, abrasion and weather.

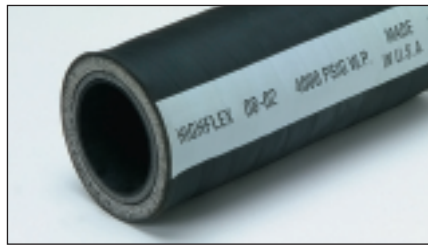

| |
|--|
| Resistance: |
| |
| Branding: |
| Thermoid HBD Industries Highflex Rotary 4000 PSIG Grade C Made In USA Month Year + Warning: Caution Statement |

- Cover Color:** Black
- Oil Resistance:** High
- Construction:**
 - Tube:** NBR, RMA Class A and ISO 6807: 2nd Edition
 - Cover:** CR Grade C and ISO 6807: 2nd Edition with white layline stripe
 - Reinforcement:** Multiple layers of spiralled high tensile carbon steel wire
- Temperature Range:** -20°F to +212°F
-29°C to +100°C
- Packaging:** 100 ft. lengths maximum
Lengths for Coupled Assemblies hose are measured overall from threaded end to threaded end of the couplings
Lengths tolerance is ± 1% for the over-all length of the hose or hose assembly.
- Couplings:** Highflex special internal expanded and swaged-on couplings for hose made to length. 3" male API line pipe thread on 2-1/2" size hose. 4" male API line pipe thread on 3" and 3-1/2" size hose. Flanges or Hammer Unions can also be added to couplings.

| Product Number | Nominal I.D. | | Nominal O.D. | | Plies | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|-------|--------------|-------|-------|------------------|-------|------------------|---------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 34844402002▲ | 2-1/2 | 63.50 | 4.06 | 103.1 | 6 | 4000 | 27.59 | 48.00 | 1219.20 | 9.73 | 14.48 |
| 34844403002▲ | 3 | 76.20 | 4.63 | 117.6 | 8 | 4000 | 27.59 | 48.00 | 1219.20 | 11.26 | 16.76 |
| 34844404002▲ | 3-1/2 | 88.90 | 5.15 | 130.8 | 8 | 4000 | 27.59 | 54.00 | 1371.60 | 15.21 | 22.64 |

▲ = Make To Order (MTO)
 * Test Pressure is 8,000 psi, a 2:1 ratio to working pressure.
 Minimum burst is 10,000 psi for each size, a 2.5:1 ratio to working pressure.

SLIM HOLE ROTARY DRILLING

Slim Hole Rotary Drilling hose is designed specifically for rotary drilling on portable drilling rigs, workover rigs, slim hole and seismograph rigs. This hose features a CR cover and an NBR tube which offer excellent resistance to heat, oil, abrasion and weather. Plus this hose has a reinforcement of multiple layers of high tensile steel wire and two fabric plies which give this hose high strength and flexibility. Long 100 ft. lengths help reduce possible connection problems.



| |
|--|
| Resistance: |
| |
| Branding: |
| Thermoid HBD Industries Slim Hole Rotary 2500 PSI WP Serial Number Made In USA |

- Cover Color:** Black
- Oil Resistance:** High
- Construction:**
 - Tube:** NBR, RMA Class A
 - Cover:** CR with white layline stripe – pinpricked
 - Reinforcement:** Multiple layers of spiralled high tensile steel wire, plus two fabric plies under the wire
- Temperature Range:** -20°F to +200°F
-29°C to +93°C
- Packaging:** 100 ft. lengths maximum
- Couplings:** Swaged on high pressure carbon steel male NPT or API threaded ends or reusable couplings

| Product Number | Nominal I.D. | | Nominal O.D. | | Plies | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|-------|--------------|--------|-------|------------------|-------|------------------|--------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 34844487002▲ | 2 | 50.80 | 3.13 | 79.38 | 4 | 2500 | 17.24 | 18.00 | 457.20 | 5.00 | 7.44 |
| 34844488002▲ | 2-1/2 | 63.50 | 3.63 | 92.08 | 4 | 2500 | 17.24 | 24.00 | 609.60 | 6.00 | 8.93 |
| 34844489002▲ | 3 | 76.20 | 4.19 | 106.36 | 4 | 2500 | 17.24 | 30.00 | 762.00 | 7.00 | 10.42 |

▲ = Make To Order (MTO)
 * Test Pressure is 5,000 psi, a 2:1 ratio to working pressure.
 Minimum burst is 6,250 psi for each size.

Product information is subject to change. For full details, visit our website or contact Customer Service.

BLAST-FLEX™ SAND BLAST

Blast-Flex Sand Blast hose has been engineered to handle the cleaning, cutting or finishing stone, glass and metal surfaces. This hose will conduct sand, steel, shot or other sharp abrasives at high velocity. Blast-Flex features a 1/4" thick, SBR/NR tube that resists abrasion in sandblast service. The static-conducting properties of this hose prevent the build-up of electrical charges. The black SBR/EPDM cover resists abrasions, cuts and snags. The reinforcement of four spiral plies of heavy fabric resists collapsing and kinking when the hose is bent. The larger sizes of Blast-Flex are reinforced with heavier weight fabric for added strength.



Resistance:



Branding:

HBD Industries Sand Blast
Made In USA

| | |
|---------------------------|--|
| Cover Color: | Black |
| Oil Resistance: | Limited |
| Construction: | |
| Tube: | SBR/NR, 1/4" thick |
| Cover: | SBR/EPDM |
| Reinforcement: | Multiple plies of heavy fabric |
| Temperature Range: | -40°F to +160°F -40°C to +71°C |
| Packaging: | 50 ft. maximum, all lengths Minimum order is 500 ft. per size |

| Product Number | Nominal I.D. | | Nominal O.D. | | Plies | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|-------|--------------|-------|-------|------------------|-------|------------------|------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 17776010502 | 3/4 | 19.05 | 1.50 | 38.10 | 4 | 150 | 1.03 | n/a | n/a | 0.70 | 1.04 |
| 17776015502 | 1 | 25.40 | 1.88 | 47.63 | 4 | 150 | 1.03 | n/a | n/a | 1.00 | 1.49 |
| 17776025502▲ | 1-1/4 | 31.75 | 2.16 | 54.77 | 4 | 150 | 1.03 | n/a | n/a | 1.20 | 1.79 |
| 17776035502 | 1-1/2 | 38.10 | 2.38 | 60.33 | 4 | 150 | 1.03 | n/a | n/a | 1.30 | 1.93 |
| 17776040502▲ | 2 | 50.80 | 2.88 | 73.03 | 4 | 100 | 0.69 | n/a | n/a | 1.70 | 2.53 |
| 17776045502▲ | 2-1/2 | 63.50 | 3.41 | 86.52 | 4 | 100 | 0.69 | n/a | n/a | 2.00 | 2.98 |
| 17776050502 | 3 | 76.20 | 3.91 | 99.22 | 4 | 100 | 0.69 | n/a | n/a | 2.40 | 3.57 |

▲ = Make To Order (MTO)

n/a = Not Applicable

WRAPPED SAND BLAST

Wrapped Sand Blast hose has been engineered to handle the cleaning, cutting or finishing stone, glass and metal surfaces. This hose will conduct sand, steel, shot or other sharp abrasives at high velocity. Wrapped Sand Blast features a 1/4" thick, SBR/NR tube that resists abrasion in sandblast service. The static-conducting properties of this hose prevent the build-up of electrical charges. The black SBR/EPDM cover resists abrasions, cuts and snags. The reinforcement of four spiral plies of heavy fabric resists collapsing and kinking when the hose is bent. The larger sizes of Wrapped Sand Blast are reinforced with heavier weight fabric for added strength.



Resistance:



Branding:

Thermoid HBD Industries
Sand Blast Hose WP
Made In USA

| | |
|------------------------|--|
| Cover Color: | Black |
| Oil Resistance: | Limited |
| Construction: | |
| Tube: | SBR/NR, 1/4" thick |
| Cover: | SBR/EPDM |
| Reinforcement: | Multiple plies of heavy fabric |
| Packaging: | 50 ft. maximum, all lengths Minimum order is 500 ft. per size |

| Product Number | Nominal I.D. | | Nominal O.D. | | Plies | Working Pressure | | Min. Bend Radius | | Weight | |
|----------------|--------------|-------|--------------|-------|-------|------------------|-------|------------------|------|---------|--------|
| | (inches) | (mm) | (inches) | (mm) | | (psi) | (Mpa) | (inches) | (mm) | (lb/ft) | (Kg/m) |
| 21224407502 | 1/2 | 12.70 | 1.19 | 30.16 | 4 | 150 | 1.03 | n/a | n/a | 0.50 | 0.74 |
| 21224400502▲ | 3/4 | 19.05 | 1.50 | 38.10 | 4 | 150 | 1.03 | n/a | n/a | 0.70 | 1.04 |
| 21224401502 | 1 | 25.40 | 1.88 | 47.63 | 4 | 150 | 1.03 | n/a | n/a | 1.00 | 1.49 |
| 21224402502▲ | 1-1/4 | 31.75 | 2.16 | 54.77 | 4 | 150 | 1.03 | n/a | n/a | 1.20 | 1.79 |
| 21224403502▲ | 1-1/2 | 38.10 | 2.38 | 60.33 | 4 | 150 | 1.03 | n/a | n/a | 1.30 | 1.93 |
| 21224404502▲ | 2 | 50.80 | 2.88 | 73.03 | 4 | 100 | 0.69 | n/a | n/a | 1.70 | 2.53 |

▲ = Make To Order (MTO)

n/a = Not Applicable