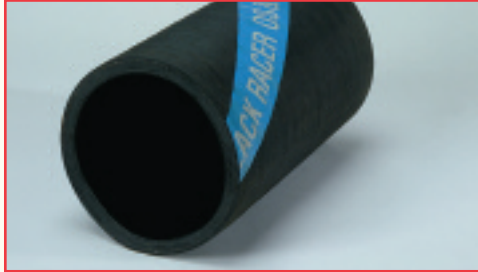


**BLACK RACER™ OS & D****HBD/Thermoid, Inc.**


SUBSIDIARY OF HBD INDUSTRIES, INC.

**Competitive Hoses:**

Goodyear: Smooth Bore Dock 200  
 Gates: Seahorse Fuel Transfer

FEATURES	BENEFITS
NBR, RMA Tube - Class A	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Handles Gasoline, Oil and Other Petroleum Products</li> </ul>
CR Cover	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> </ul>
4-Ply Polyester Tire Cord with Wire Helix Reinforcement	<ul style="list-style-type: none"> <li>• Provides a 200 psi Working Pressure</li> <li>• Can Handle Full Vacuum (30 in. of Hg) Applications</li> </ul>
100 Ft. Lengths	<ul style="list-style-type: none"> <li>• 100 Ft. Lengths</li> </ul>

## CHEMICAL/SOLVENT - UHMW POLYETHYLENE LINING (Smooth Bore)

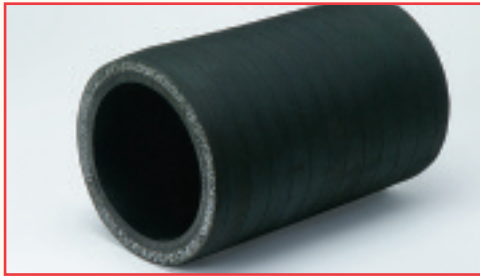

**HBD/Thermoid, Inc.**

SUBSIDIARY OF HBD INDUSTRIES, INC.

**Competitive Hoses:**

FEATURES	BENEFITS
UHMWPE Tube	<ul style="list-style-type: none"> <li>• High Oil Resistance at 70°F</li> <li>• Handles Most Chemicals and Solvents</li> </ul>
CR Cover	<ul style="list-style-type: none"> <li>• High Oil Resistance at 70°F</li> </ul>
4- or 6-Ply Synthetic Tire Cord with Single Steel Wire Helix Reinforcement	<ul style="list-style-type: none"> <li>• Constant Working Pressure at 200 psi, Regardless of I.D.</li> </ul>
Smooth Bore Construction	<ul style="list-style-type: none"> <li>• Meets All U. S. Coast Guard Requirements</li> </ul>

## HY-FLEX™ 200/275/300 DOCK - NYLON/UHMPE TUBE (Rough Bore)



**HBD/Thermoid, Inc.**


SUBSIDIARY OF HBD INDUSTRIES, INC.

**Competitive Hoses:**



FEATURES	BENEFITS
Round, Galvanized Bore Wire, Plain Unbound Nylon Liner, UHMWPE Liner	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Ideal for Use with Chemicals, Oils and Hydrocarbons Tube to 100% and MTBE to 100%</li> <li>• Smooth Flow of Product Through the System</li> </ul>
CR Cover	<ul style="list-style-type: none"> <li>• Medium-High Oil Resistance</li> <li>• Ozone Resistant</li> <li>• Resists Weathering</li> </ul>
2-,4- or 6-Ply Polyester Tire Cord With High Strength Steel Wire Helix Reinforcement	<ul style="list-style-type: none"> <li>• 3 Grades of Working Pressures: 200, 275, 300 psi</li> </ul>

## SAFETYFLEX®

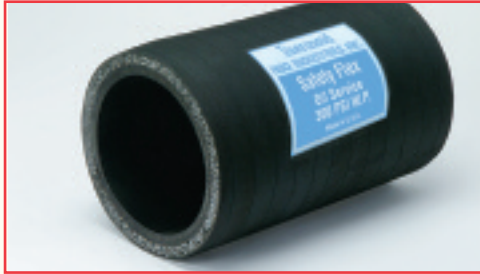
**HBD/Thermoid, Inc.**
SUBSIDIARY OF HBD INDUSTRIES, INC.

**Competitive Hoses:**  
 Goodyear: Smooth Bore Dock 300  
 Gates: Seahorse HW


FEATURES	BENEFITS
<b>NBR, RMA Tube - Class A</b>	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Resists Gasoline and Other Petroleum Based Fluids</li> </ul>
<b>CR Cover</b>	<ul style="list-style-type: none"> <li>• Medium-High Oil Resistance</li> <li>• Abrasion Resistant</li> <li>• Resists Weathering</li> </ul>
<b>4, 6 or 8 Layers of Spiraled High-Tensile Steel Wire Embedded Reinforcement</b>	<ul style="list-style-type: none"> <li>• Provides a Constant 300 psi Working Pressure Regardless of Hose Size</li> <li>• Exceptional 13:1 Safety Factor</li> </ul>
<b>100 Ft. Lengths</b>	<ul style="list-style-type: none"> <li>• Reduces Connection Problems</li> </ul>
<b>Dock Hose Constructions</b>	<ul style="list-style-type: none"> <li>• Meets All U.S. Coast Guard Requirements</li> </ul>
<b>Unique Coupling Design</b>	<ul style="list-style-type: none"> <li>• Protects Against Blow-Offs</li> <li>• Protects Against Leaks</li> </ul>

## SAFETYFLEX® WATER JETTING


**HBD/Thermoid, Inc.**
SUBSIDIARY OF HBD INDUSTRIES, INC.
**Competitive Hoses:**

FEATURES	BENEFITS
NBR, RMA Tube - Class A	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Ozone Resistant</li> <li>• Suitable for High Flow Velocity</li> </ul>
CR Cover	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Weathering and Ozone Resistant</li> </ul>
4-, 6-, or 8-Ply Plated Steel Wire Reinforcement	<ul style="list-style-type: none"> <li>• Constant 1500 psi Working Pressure, Regardless of Reinforcement Hose Size</li> </ul>
100 Ft. Lengths	<ul style="list-style-type: none"> <li>• Reduces the Number of Connection Problems</li> </ul>
U.S. Coast Guard Approval	<ul style="list-style-type: none"> <li>• Meets All USCG Requirements</li> </ul>

## SUBMARINE 225 PSI (Smooth Bore)

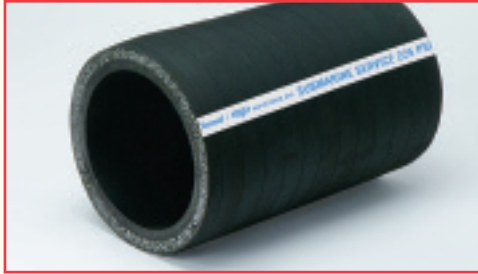


**HBD/Thermoid, Inc.**

SUBSIDIARY OF HBD INDUSTRIES, INC.

**Competitive Hoses:**  
Goodyear: Thor Submarine  
Gates: SB Submarine

FEATURES	BENEFITS
<b>NBR, RMA Tube - Class A</b>	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Handles Oil Transfers Fully or Partially Submerged Underwater</li> <li>• Moisture Resistant</li> </ul>
<b>CR Cover Double Thickness</b>	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Moisture Resistance</li> <li>• Abrasion Resistant</li> <li>• Can Handle Long Periods of Submersion</li> </ul>
<b>6- or 8-Ply Galvanized Steel Wire Helix Spiralled Between Multiple Plies of Synthetic Cord Reinforcement</b>	<ul style="list-style-type: none"> <li>• Provides Working Pressure to 225 psi, Regardless of Hose Size</li> <li>• Kink Resistant</li> </ul>
<b>Meets all U.S. Coast Guard Requirements</b>	<ul style="list-style-type: none"> <li>• Meets All Industry Standards</li> </ul>

## TANK MASTER® HOT ASPHALT (Smooth Bore)

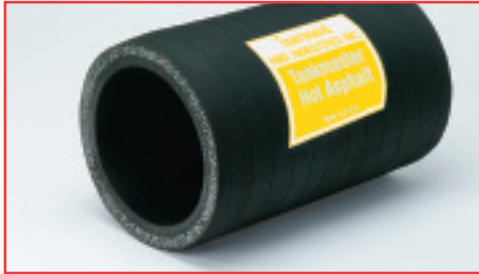


**HBD/Thermoid, Inc.**

SUBSIDIARY OF HBD INDUSTRIES, INC.

**Competitive Hoses:**  
Goodyear: Hot Tar &  
Asphalt(Smooth)

FEATURES	BENEFITS
CR Tube	<ul style="list-style-type: none"> <li>• Designed to Handle Tar, Hot Oils and Asphalt</li> <li>• High Oil Resistance</li> <li>• Handles Hot Materials up to 350°F, 177°C</li> </ul>
CR Cover	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Resists Weathering</li> </ul>
4-,6- or 8-Ply Single Wire Helical Spiralled Between Plies of Synthetic Cord	<ul style="list-style-type: none"> <li>• Provides a Constant 200 psi Working Pressure Regardless of Hose Size</li> </ul>
100 Ft. Lengths	<ul style="list-style-type: none"> <li>• Reduces the Number of Connection Problems</li> </ul>

## TANKMASTER® K200 OIL SUCTION & DISCHARGE 200 PSI (Smooth Bore)

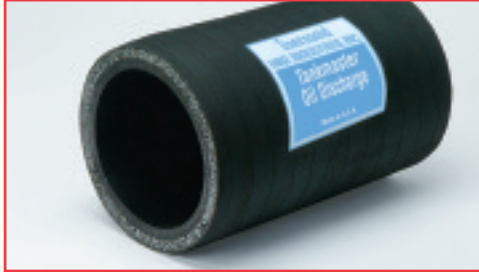

**HBD/Thermoid, Inc.**

SUBSIDIARY OF HBD INDUSTRIES, INC.


### Competitive Hoses:

Goodyear: Smooth Bore Dock 200

Gates: Seahorse Fuel Transfer

FEATURES	BENEFITS
NBR, RMA Tube - Class A	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Handles Petroleum-Based Products</li> <li>• Smooth Bore Promotes an Even Flow</li> </ul>
CR Corrugated Cover	<ul style="list-style-type: none"> <li>• Oil Resistance</li> </ul>
4- or 6-Ply Dual Steel Wire Helix Spiralled Between Multiple Plies of Spiral Tire Cords Reinforcement	<ul style="list-style-type: none"> <li>• Provides a Working Pressure of 200 psi, Regardless of Hose Size</li> </ul>
100 Ft. Lengths	<ul style="list-style-type: none"> <li>• Reduces the Number of Connection Problems</li> </ul>
Meets Industry Standards	<ul style="list-style-type: none"> <li>• Meets all Coast Guard Requirements</li> <li>• Meets USCG and RMA Type 1, Class 2 Regulations</li> </ul>

## TANKMASTER® NBR LINING 200 (Smooth Bore)

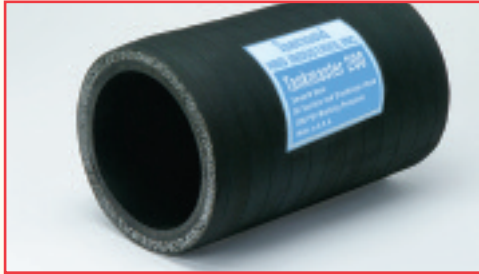


**HBD/Thermoid, Inc.**

SUBSIDIARY OF HBD INDUSTRIES, INC.

**Competitive Hoses:**

FEATURES	BENEFITS
NBR, RMA Class A Tube	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Smooth Bore Promotes an Even Flow</li> <li>• Handles Gasoline, Oils and Other Petroleum Products</li> </ul>
CR Cover	<ul style="list-style-type: none"> <li>• Oil Resistance</li> </ul>
4- or 6-Ply of Synthetic Cord with Wire Helix	<ul style="list-style-type: none"> <li>• Provides a Working Pressure to 200 psi, Regardless of Hose Size</li> <li>• Handles Full Vacuum (30 in. of Hg) Applications</li> </ul>
100 Ft. Lengths	<ul style="list-style-type: none"> <li>• Reduces the Number of Connection Problems</li> </ul>
Static Wire	<ul style="list-style-type: none"> <li>• Safety Assurance, Hose Can be Grounded</li> </ul>

## TANKMASTER® OIL DISCHARGE (Smooth Bore)

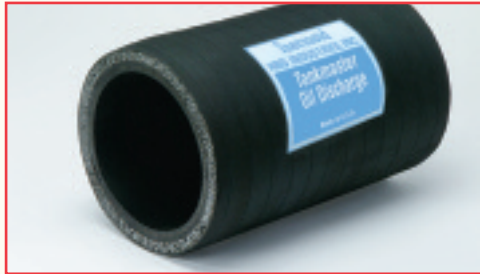

**HBD/Thermoid, Inc.**

SUBSIDIARY OF HBD INDUSTRIES, INC.

**Competitive Hoses:**

FEATURES	BENEFITS
<b>NBR, RMA Tube - Class A</b>	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Smooth Bore Promotes an Even Flow</li> <li>• Handles Gasoline, Oils, Petroleum Distillates and Petroleum Products with a 55% Aromatic Content</li> </ul>
<b>CR Cover</b>	<ul style="list-style-type: none"> <li>• Oil Resistance</li> <li>• Ozone and Weather Resistant</li> <li>• Abrasion Resistant</li> </ul>
<b>4- or 6-Ply Synthetic Cord Reinforcement</b>	<ul style="list-style-type: none"> <li>• Provides a Working Pressure of 200 psi, Regardless of Hose Size</li> </ul>
<b>Meets U.S. Coast Guard Regulations</b>	<ul style="list-style-type: none"> <li>• All HBD/Thermoid Dock Hose Meets USCG Requirements</li> </ul>

## TANKMASTER® 200/225 - FKM LINING (Smooth Bore)



**HBD/Thermoid, Inc.**

SUBSIDIARY OF HBD INDUSTRIES, INC.

**Competitive Hoses:**

Titan: SW339

Goodyear: Smooth Bore Dock 200

FEATURES	BENEFITS
<b>FKM Fluoroelastomer Exceeds RMA Class A Tube</b>	<ul style="list-style-type: none"> <li>• High Oil Resistance</li> <li>• Handles Aromatic Hydrocarbon Applications (Including Diesel Fuel) Up to 100% Aromatic</li> </ul>
<b>CR Cover</b>	<ul style="list-style-type: none"> <li>• Oil Resistance</li> </ul>
<b>4- or 6-Ply Single Wire Helix Spiralled Between Multiple Plies of Synthetic Cord Reinforcement</b>	<ul style="list-style-type: none"> <li>• Maintains its Roundness</li> <li>• Provides a Constant Working Pressure of 200 psi, Regardless of Hose Size</li> <li>• Handles Full Vacuum (30 in. of Hg) Applications</li> </ul>
<b>100 Ft. Lengths</b>	<ul style="list-style-type: none"> <li>• Reduces the Number of Connection Problems</li> </ul>
<b>Meets All U.S. Coast Guard Requirements</b>	<ul style="list-style-type: none"> <li>• All HBD/Thermoid Dock Hoses Meet All Standards Within the Industry</li> </ul>