

**ALARM® BOOSTER – Thermocure**

Thermoid's Alarm Booster hose is a high quality all-purpose fire engine booster hose product. Built to take rugged treatment, this hose has a red, NBR/PVC cover that resists abrasion while providing a smooth surface for easy handling, making it the driver's choice. This hose is engineered to be dimensionally stable and will not flatten or crush reels. The SBR/Nitrile tube is reinforced with multiple spiral aramid yarns. This hose is designed to provide a constant working pressure up to 800 psi for maximum safety. Alarm Booster hose is available in three sizes. It can also be ordered in coupled lengths, complete with factory-installed, reattachable, chrome-plated aluminum NST spanner hole couplings.



<b>Resistance:</b>
<b>Branding:</b>
Thermoid Alarm Booster Size WP Made In USA


- Cover Color:** Red
- Oil Resistance:** Medium, high
- Construction:**
  - Tube:** NBR/PVC, RMA Class A
  - Cover:** NBR/PVC, RMA Class A, 1-1/2" I.D. EPDM
  - Reinforcement:** 2-spiral aramid yarn
- Temperature Range:** -20°F to +190°F, 1-1/2" I.D. -40°F to +190°F  
-29°C to +88°C, 1-1/2" I.D. -40°C to +88°C
- Packaging:** Reels, coupled lengths available on a make-to-order basis

Product Number	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
22212482662	3/4	19.05	1.19	30.16	2	800	5.51	4.50	114.30	0.41	0.61
22214642662	1	25.40	1.50	38.10	2	800	5.51	7.00	177.80	0.51	0.76
00142524301	1-1/2	38.10	2.00	50.80	4	250	1.72	10.50	266.70	0.71	1.06

\* Reattachable chrome-plated aluminum NST spanner hole couplings available to fit 3/4" and 1" I.D.

**FIRE EXTINGUISHER – UL92**

This durable hose is specifically designed for use on portable or stationary fire extinguishers. It is Underwriters Registered to UL92. It features an EPDM tube that will handle temperatures down to -65°F. The synthetic high tensile cord reinforcement provides excellent flexibility and strength. The hose has a black, perforated cover. It offers superior performance and provides a constant working pressure of 250 psi. Thermoid Fire Extinguisher hose can be supplied in either bulk or cut to order lengths.

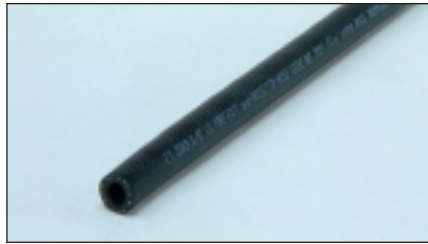

<b>Resistance:</b>
<b>Branding:</b>
Ex. 3583 (Size) Fire Ext. and Booster Hose Issue No. 2051 U/L Listed Max. Working Pressure 250 PSIG - 54°C (-65°F)

- Cover Color:** Black
- Oil Resistance:** Medium
- Construction:**
  - Tube:** EPDM, RMA Class C
  - Cover:** EPDM, RMA Class C
  - Reinforcement:** Synthetic high tensile cord
- Temperature Range:** -65°F to +190°F  
-54°C to +88°C
- Packaging:** Bulk or cut lengths

Product Number	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
00134606305▲	3/8	9.53	0.69	17.46	2	250	1.72	2.25	57.15	0.14	0.21
00134608305▲	1/2	12.70	0.94	23.81	4	250	1.72	3.00	76.20	0.26	0.39

▲ = Make To Order (MTO)