


2428 MARINER PREMIUM WET EXHAUST SAE J2006

The Mariner hose is the top-of-the-line marine exhaust hose. This multi-ply soft wall hose is designed to be used as a straight connection in wet exhaust systems on marine gasoline or diesel engines. The CR/NBR blended cover is oil, heat and ozone resistant. The tube is an NBR/SBR blend that gives this hose coolant and heat resistance

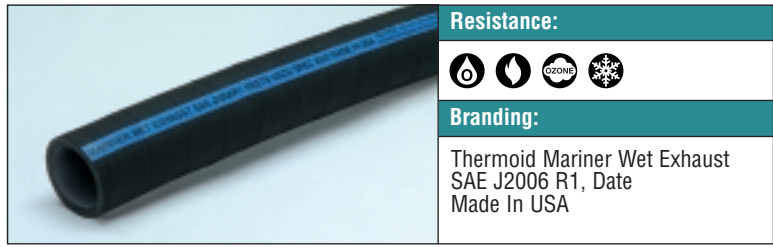

Resistance:
Branding:
Thermoid Mariner Wet Exhaust SAE J2006 R1, Date Made In USA

- Cover Color:** Black
- Oil Resistance:** Medium to Medium-High
- Construction:**
 - Tube:** NBR/SBR blend
 - Cover:** CR/NBR blend
 - Reinforcement:** Tire cord
- Temperature Range:** 0°F to +212°F
-18°C to +100°C
- Packaging:** 12 ft. and 60 ft. lengths available
Contact customer service for minimum run requirements
Other lengths available – 5% cutting charge

Product Number 12 Feet	Product Number 60 Feet	Nominal I.D. (inches) (mm)	Nominal O.D. (inches) (mm)	Plies	Working Pressure (psi) (Mpa)	Min. Bend Radius (inches) (mm)	Weight (lb/ft) (Kg/m)	Std. Case
16242807512▲	16242807560▲	3/4 19.05	1.38 34.93	2	200 1.38	n/a n/a	0.61 0.91	2
16242808712▲	16242808760▲	7/8 22.23	1.50 38.10	2	200 1.38	n/a n/a	0.68 1.01	2
16242810012▲	16242810060▲	1 25.40	1.63 41.28	2	200 1.38	n/a n/a	0.75 1.12	2
16242810612▲	16242810660▲	1-1/16 26.99	1.69 42.86	2	200 1.38	n/a n/a	0.78 1.16	2
16242811212▲	16242811260▲	1-1/8 28.58	1.75 44.45	2	200 1.38	n/a n/a	0.82 1.22	2
16242812512▲	16242812560▲	1-1/4 31.75	1.88 47.63	2	200 1.38	n/a n/a	0.89 1.32	2
16242813112▲	16242813160▲	1-5/16 33.34	1.94 49.21	2	200 1.38	n/a n/a	0.93 1.38	2
16242813712▲	16242813760▲	1-3/8 34.93	2.00 50.80	2	200 1.38	n/a n/a	0.95 1.41	2
16242815012▲	16242815060▲	1-1/2 38.10	2.13 53.98	2	200 1.38	n/a n/a	1.02 1.52	2
16242816212▲	16242816260▲	1-5/8 41.28	2.25 57.15	2	200 1.38	n/a n/a	1.05 1.56	2
16242817512▲	16242817560▲	1-3/4 44.45	2.38 60.33	2	200 1.38	n/a n/a	1.12 1.67	2
16242818712▲	16242818760▲	1-7/8 47.63	2.50 63.50	2	200 1.38	n/a n/a	1.19 1.77	2
16242820012▲	16242820060▲	2 50.80	2.63 66.68	2	200 1.38	n/a n/a	1.25 1.86	2
16242821212▲	16242821260▲	2-1/8 53.98	2.75 69.85	2	200 1.38	n/a n/a	1.32 1.96	1
16242822512▲	16242822560▲	2-1/4 57.15	2.88 73.03	4	200 1.38	n/a n/a	1.59 2.37	1
16242823712▲	16242823760▲	2-3/8 60.33	3.00 76.20	4	175 1.21	n/a n/a	1.67 2.49	1
16242825012▲	16242825060▲	2-1/2 63.50	3.25 82.55	4	175 1.21	n/a n/a	1.73 2.57	1
16242826212▲	16242826260▲	2-5/8 66.68	3.38 85.73	4	175 1.21	n/a n/a	1.81 2.69	1
16242827512▲	16242827560▲	2-3/4 69.85	3.50 88.90	4	175 1.21	n/a n/a	1.88 2.80	1
16242828712▲	16242828760▲	2-7/8 73.03	3.63 92.08	4	175 1.21	n/a n/a	1.95 2.90	1
16242830012▲	16242830060▲	3 76.20	3.75 95.25	4	150 1.03	n/a n/a	2.03 3.02	1
16242831212▲	16242831260▲	3-1/8 79.38	3.88 98.43	4	150 1.03	n/a n/a	2.10 3.13	1
16242832512▲	16242832560▲	3-1/4 82.55	4.00 101.60	4	150 1.03	n/a n/a	2.18 3.24	1
16242835012▲	16242835060▲	3-1/2 88.90	4.25 107.95	4	150 1.03	n/a n/a	2.32 3.45	1
16242837512▲	16242837560▲	3-3/4 95.25	4.50 114.30	4	150 1.03	n/a n/a	2.47 3.68	1
16242840012▲	16242840060▲	4 101.60	4.75 120.65	4	150 1.03	n/a n/a	2.62 3.90	1
16242845012▲	16242845060▲	4-1/2 114.30	5.25 133.35	4	150 1.03	n/a n/a	2.91 4.33	1
16242850012▲	16242850060▲	5 127.00	5.75 146.05	4	150 1.03	n/a n/a	3.21 4.78	1
16242855012▲	16242855060▲	5-1/2 139.70	6.25 158.75	4	150 1.03	n/a n/a	3.50 5.21	1
16242860012▲	16242860060▲	6 152.40	6.63 168.28	4	150 1.03	n/a n/a	3.79 5.64	1
16242866212▲		6-5/8 168.28	7.63 193.68	6	150 1.03	n/a n/a	5.47 8.14	1
16242870012▲		7 177.80	8.00 203.20	6	150 1.03	n/a n/a	5.75 8.56	1
16242880012▲		8 203.20	9.00 228.60	6	100 0.69	n/a n/a	6.50 9.67	1
16242886212▲		8-5/8 219.08	9.63 244.48	6	100 0.69	n/a n/a	6.98 10.39	1
16242810112▲		10 254.00	11.00 279.40	6	90 0.62	n/a n/a	8.03 11.95	1
16242810712▲		10-3/4 273.05	11.75 298.45	6	75 0.52	n/a n/a	8.64 12.86	1
16242812012▲		12 304.80	13.00 330.20	6	60 0.41	n/a n/a	9.59 14.27	1
16242812712▲		12-3/4 323.85	13.75 349.25	6	50 0.34	n/a n/a	10.12 15.06	1

▲ = Make To Order (MTO)
n/a = Not Applicable

AUTOMOTIVE/MARINE COOLANT Marine – Coolant, Fuel & Wet Exhaust