


3005 SILICONE COOLANT HEATER SAE 20R3 CLASS A

Type 3005 Silicone Heater hose is recommended for those applications in the heavy-duty market. This hose features a special silicone compound that meets the SAE 20R3, Class A specifications. Type 3005 Silicone Heater hose is highly resistant to the deteriorating effects of oil, ozone, coolants and coolant additives. The nylon reinforcement enables this hose to be extremely flexible while resisting temperatures up to +347° (+175°C).

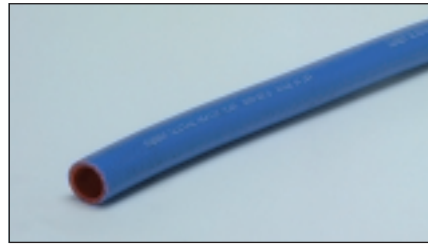

Resistance:
Branding:
Silicone Heater Hose - 3005, I.D., Made In USA


Cover Color: Blue
Oil Resistance: High
Construction:
Tube: Silicone
Cover: Silicone
Reinforcement: Nylon
Temperature Range: -67°F to +347°F
 -55°C to +175°C
Packaging: 50 ft. in a carton

Product Number	Nominal I.D.		Nominal O.D.		Plies	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
16300502550▲	1/4	6.35	0.56	14.29	2	63	0.43	n/a	n/a	0.19	0.28
16300503750▲	3/8	9.53	0.69	17.46	2	63	0.43	n/a	n/a	0.25	0.37
16300505050▲	1/2	12.70	0.81	20.64	2	63	0.43	n/a	n/a	0.29	0.43
16300506250▲	5/8	15.88	0.94	23.81	2	63	0.43	n/a	n/a	0.35	0.52
16300507550▲	3/4	19.05	1.06	26.99	2	50	0.34	n/a	n/a	0.39	0.58
16300508750▲	7/8	22.23	1.19	30.16	2	50	0.34	n/a	n/a	0.44	0.65
16300510050▲	1	25.40	1.34	34.13	2	44	0.30	n/a	n/a	0.49	0.73

▲ = Make To Order (MTO)
 n/a = Not Applicable

3009 SILCOFLEX™ SILICONE COOLANT HARD WALL

Silcoflex is the industry standard for steel wire reinforced multipurpose silicone hose. The polyester with a helical wire reinforcement makes this hose very flexible and resistant to kinking and vacuum. The silicone tube and cover makes this hose extremely resistant to the ravages of heat and hostile environments. This hose is recommended for upper and lower radiator applications in the heavy-duty and off-road markets. **Full vacuum** rating for all sizes.

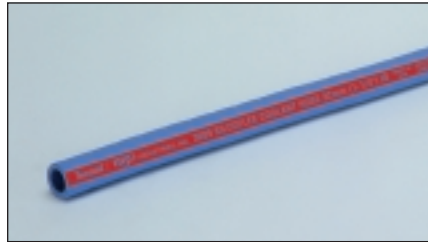

Resistance:
Branding:
Similar to SAE20R2, Class A. Also Meets SAE J2006R2

Cover Color: Blue
Oil Resistance: High
Construction:
Tube: Silicone
Cover: Silicone
Reinforcement: Polyester with a helical wire
Temperature Range: -67°F to +347°F
 -55°C to +175°C
Packaging: 60 ft.
 Other lengths available – 5% cutting charge
 Contact customer service for minimum run requirements

Product Number	Nominal I.D.		Nominal O.D.		Plies	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
16300907560▲	3/4	19.05	1.19	30.16	2	75	0.51	3.00	76.20	0.43	0.62
16300910060▲	1	25.40	1.44	36.51	2	75	0.48	4.00	101.60	0.56	0.83
16300911260▲	1-1/8	28.58	1.56	39.69	2	69	0.45	4.50	114.30	0.61	0.91
16300912560▲	1-1/4	31.75	1.69	42.86	2	69	0.40	5.00	127.00	0.66	0.98
16300913760▲	1-3/8	34.93	1.81	46.04	2	69	0.40	5.50	139.70	0.72	1.07
16300915060▲	1-1/2	38.10	1.94	49.21	2	63	0.40	6.00	152.40	0.76	1.13
16300916260▲	1-5/8	41.28	2.06	52.39	2	56	0.38	6.50	165.10	0.82	1.22
16300917560▲	1-3/4	44.45	2.19	55.56	2	56	0.38	7.00	177.80	0.87	1.29
16300918760▲	1-7/8	47.63	2.31	58.74	2	50	0.34	7.50	190.50	0.93	1.38
16300920060▲	2	50.80	2.44	61.91	2	50	0.32	8.00	203.20	0.97	1.44
16300921260▲	2-1/8	53.98	2.56	65.09	2	44	0.14	8.50	215.90	1.03	1.53
16300922560▲	2-1/4	57.15	2.69	68.26	2	44	0.14	9.00	228.60	1.05	1.56
16300923760▲	2-3/8	60.33	2.81	71.44	2	40	0.30	9.50	228.60	1.10	1.64
16300925060▲	2-1/2	63.50	2.94	74.61	2	38	0.28	10.00	254.00	1.15	1.71
16300926260▲	2-5/8	66.68	3.06	77.79	2	31	0.26	10.50	266.70	1.34	1.99
16300927560▲	2-3/4	69.85	3.19	80.96	2	31	0.26	11.00	279.40	1.40	2.08
16300928760▲	2-7/8	73.03	3.31	84.14	2	25	0.25	11.50	292.10	1.47	2.19
16300930060▲	3	76.20	3.44	87.31	2	25	0.24	12.00	304.80	1.52	2.26
16300940060▲	4	101.60	4.44	112.71	2	13	0.21	16.00	406.40	2.17	3.23

▲ = Make To Order (MTO)

AUTOMOTIVE/MARINE COOLANT Automotive – Air Brake, Fuel, Heater & Coolant