

Product information is subject to change. For full details, visit our website or contact Customer Service.

MAINLINER®

Mainliner is designed to handle the oily mists used to lubricate pneumatic tools. This hose is an excellent choice for use with pneumatic tools throughout the industry. It features a medium oil-resistant tube with multi-spiral polyester reinforcement that keeps it flexible even in extreme temperatures. The durable cover resists abrasion, cracking, weathering and ozone. Mainliner offers constant working pressures of 200, 250 and 300 psi. Mainliner is the quality value choice for a general service hose for oily, pneumatic equipment lubrication.

Note: Not recommended for handling fuels.



Resistance:



Branding:

Thermoid Mainliner Size PSI WP
Made In USA

Cover Color:	Red
Oil Resistance:	Medium
Construction:	
Tube:	EPDM, RMA Class C
Cover:	EPDM - Limited
Reinforcement:	Spiral polyester yarn
Temperature Range:	-40°F to +200°F -40°C to +93°C
Packaging:	Reels or †50 ft. length – 1 per carton


Product Number	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
00225504200▲	1/4	6.35	0.49	12.45	2	200	1.38	1.50	38.10	0.09	0.13
00225504400	1/4	6.35	0.62	15.75	4	300	2.07	1.50	38.10	0.15	0.22
00225505400	5/16	7.94	0.62	15.75	4	300	2.07	2.00	50.80	0.14	0.21
00225506200▲	3/8	9.53	0.68	17.27	2	200	1.38	2.25	57.15	0.15	0.22
00225506400	3/8	9.53	0.71	18.03	4	300	2.07	2.25	57.15	0.18	0.27
00225508200▲	1/2	12.70	0.81	20.64	2	200	1.38	3.00	76.20	0.19	0.28
00225508400	1/2	12.70	0.84	21.34	4	300	2.07	3.00	76.20	0.25	0.37
00225510400	5/8	15.88	1.00	25.40	4	300	2.07	3.75	95.25	0.30	0.45
00225512300	3/4	19.05	1.15	29.21	4	250	1.72	4.50	114.30	0.37	0.55
00225512351†▲	3/4	19.05	1.15	29.21	4	250	1.72	4.50	114.30	0.37	0.55
00225512400	3/4	19.05	1.15	29.21	4	300	2.07	4.50	114.30	0.37	0.55
00225512451†	3/4	19.05	1.15	29.21	4	300	2.07	4.50	114.30	0.37	0.55
00225516200▲	1	25.40	1.37	34.80	4	200	1.38	7.00	177.80	0.42	0.62
00225516400	1	25.40	1.43	36.20	4	300	2.07	7.00	177.80	0.50	0.74
00225520200	1-1/4	31.75	1.75	44.45	4	200	1.38	8.75	222.25	0.81	1.21
00225524200	1-1/2	38.10	2.00	50.80	4	200	1.38	10.50	266.70	0.94	1.40
00225532200	2	50.80	2.55	64.77	4	200	1.38	14.00	355.60	1.12	1.67

▲ = Make To Order (MTO)

† = 50 ft. length – 1 per carton

AIRFLEX™

Airflex hose is the quality choice for any application where a medium oil resistant tube is needed to lubricate air tools. Airflex has a working pressure to 300 psi in a full range of sizes from 1/4" I.D. to 3/4" I.D. It has a highly visible yellow cover that is weather, ozone and abrasion resistant. Airflex has a durable 4-spiral construction to handle abuse oriented applications and a yellow cover for coding applications. Stock the quality choice, the right choice, the highly visible, Airflex hose.

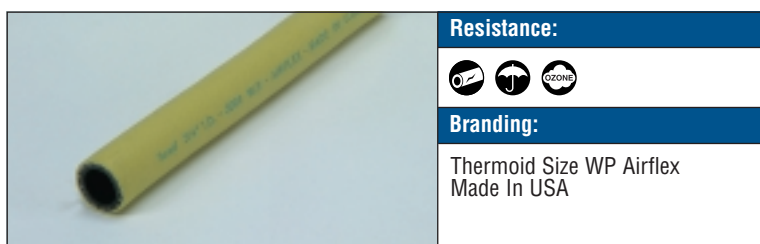

Resistance:



Branding:

Thermoid Size WP Airflex
Made In USA

Cover Color:	Yellow
Oil Resistance:	Medium
Construction:	
Tube:	EPDM, RMA Class C
Cover:	EPDM - Limited
Reinforcement:	Spiral polyester yarn
Temperature Range:	-40°F to +200°F -40°C to +93°C
Packaging:	Reels or †50 ft. length – 1 per carton

Product Number	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
00235504400▲	1/4	6.35	0.62	15.75	4	300	2.07	1.50	38.10	0.15	0.22
00235506400	3/8	9.53	0.71	18.03	4	300	2.07	2.25	57.15	0.18	0.27
00235508400	1/2	12.70	0.84	21.34	4	300	2.07	3.00	76.20	0.25	0.37
00235512400	3/4	19.05	1.15	29.21	4	300	2.07	4.50	114.30	0.37	0.55
00235512451†	3/4	19.05	1.15	29.21	4	300	2.07	4.50	114.30	0.37	0.55

▲ = Make To Order (MTO)

† = 50 ft. length – 1 per carton