

**TULINE WELDING, GRADE T**


For use with all fuel gases, and where a flame and oil resistant tube and cover are required.

Product Number	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
00521503200▲	3/16	4.76	0.44	11.11	2	200	1.38	1.25	31.75	0.17	0.25
00521504200	1/4	6.35	0.53	13.49	2	200	1.38	1.50	38.10	0.24	0.36
00521505200▲	5/16	7.94	0.59	15.08	2	200	1.38	2.00	50.80	0.27	0.40
00521506200	3/8	9.53	0.66	16.67	2	200	1.38	2.25	57.15	0.31	0.46

▲ = Make To Order (MTO)

**TULINE WELDING, GRADE T – Cut & Coupled (B&B)**

Product Number	Nominal I.D.		Lengths	
	(inches)	(mm)	(feet)	(meters)
00521583250▲	3/16	4.76	50.00	15.24
00521584212▲	1/4	6.35	12.50	3.81
00521584225▲	1/4	6.35	25.00	7.62
00521584250	1/4	6.35	50.00	15.24
00521584290	1/4	6.35	100.00	30.48
00521585250▲	5/16	7.94	50.00	15.24
00521586250▲	3/8	9.53	50.00	15.24
00521586290▲	3/8	9.53	100.00	30.48

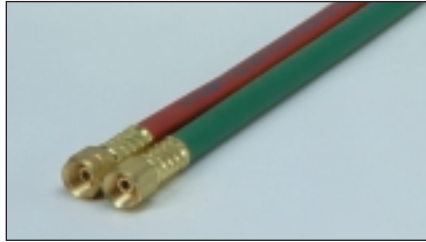

▲ = Make To Order (MTO)

**SINGLE LINE CORRUGATED WELDING, GRADE T**

Red or Green. Red is used with all fuel gases, and where a flame and oil resistant tube and cover are required.

Product Number	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
<b>Green</b>											
00523803205▲	3/16	4.76	0.44	11.11	4	200	1.38	1.25	31.75	0.08	0.12
00523804405	1/4	6.35	0.59	15.08	4	200	1.38	1.50	38.10	0.15	0.22
00523805400▲	5/16	7.94	0.59	15.08	2	200	1.38	2.00	50.80	0.14	0.21
00523806400▲	3/8	9.53	0.72	18.26	4	200	1.38	2.25	57.15	0.20	0.30
<b>Red</b>											
00523903205▲	3/16	4.76	0.44	11.11	4	200	1.38	1.25	31.75	0.08	0.12
00523904405	1/4	6.35	0.59	15.08	4	200	1.38	1.50	38.10	0.15	0.22
00523905400▲	5/16	7.94	0.59	15.08	2	200	1.38	2.00	50.80	0.14	0.21
00523906400▲	3/8	9.53	0.72	18.26	4	200	1.38	2.25	57.15	0.20	0.30

▲ = Make To Order (MTO)