


Product information is subject to change. For full details, visit our website or contact Customer Service.

TYPE 924 PETROLEUM TRANSFER

Type 924 Petroleum Transfer hose is perfect for those applications for the bulk transfer of petroleum products. This hose can also be used to handle most hydrocarbons with aromatic content up to 55% maximum, fats, greases, animal oil, vegetable oil, hydraulic fluid and a wide range of chemicals. The black NBR tube has excellent resistance to oil. The cover compound of NBR/PVC is both oil and abrasion resistant. This hose is rated at **full vacuum**.

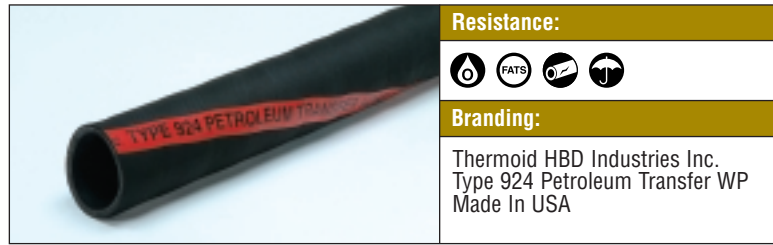

Resistance:



Branding:

Thermoid HBD Industries Inc.
Type 924 Petroleum Transfer WP
Made In USA

Cover Color:	Black
Oil Resistance:	High
Construction:	
Tube:	NBR, RMA Class A
Cover:	NBR/PVC, RMA Class B
Reinforcement:	Spiral steel wire helix(es) between synthetic textile plies
Temperature Range:	-30°F to +200°F -34°C to +93°C
Packaging:	100 ft. maximum

Product Number	Nominal I.D.		Nominal O.D.		Plies	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
17812008002	1	25.40	1.50	38.10	2	200	1.38	2.50	63.50	0.50	0.74
17812010002	1-1/4	31.75	1.75	44.45	2	200	1.38	3.00	76.20	0.70	1.04
17812015002	1-1/2	38.10	2.00	50.80	2	150	1.03	4.50	114.30	0.80	1.19
17812020002	2	50.80	2.47	62.71	2	150	1.03	6.00	152.40	1.00	1.49
17812025002	2-1/2	63.50	3.06	77.79	2	150	1.03	7.50	190.50	1.50	2.23
17812030002	3	76.20	3.56	90.49	2	150	1.03	9.00	228.60	1.70	2.53
17812040002	4	101.60	4.63	117.48	2	150	1.03	12.00	304.80	2.50	3.72
17812060002▲	6	152.40	6.75	171.45	2	100	0.69	30.00	762.00	5.00	7.44

▲ = Make To Order (MTO)

TRANSPORTER® FLEX-DEVIL™

Flex-Devil is a transfer hose for gasoline, a wide range of oils and chemicals and petroleum based products. Flex-Devil is made from special rubber compounds that produce an exceptional light-weight and flexible hose for use in temperatures down to -40°F (-40°C). Rated at **full vacuum** (30"Hg), Flex-Devil is compatible with gasoline grades up to 50% aromatic content and MRBE/unleaded blends up to 15% MTBE. This hose accepts a range of coupling types: swaged crimped, internally expanded or banded shank. **Consult coupling manufacturer for specific coupling recommendations/attachment procedures.**



Resistance:



Branding:

Thermoid/HBD Industries
Transporter Flex-Devil 150 PSI WP
Made In USA – Caution Statement

Cover Color:	Red
Oil Resistance:	High
Construction:	
Tube:	NBR, RMA Class A (low temperature)
Cover:	CR, RMA Class B (corrugated)
Reinforcement:	Multiple ply synthetic textile cords with dual helix wire
Temperature Range:	-40°F to +200°F -40°C to +93°C
Packaging:	100 ft. lengths, straight ends only
Couplings:	Accepts variety of types. Consult coupling manufacturers for proper procedures.

Product Number	Nominal I.D.		Nominal O.D.		Plies	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
17814532002	2	50.80	2.43	61.70	2	150	1.03	4.00	101.60	0.90	1.35
17814534002	3	76.20	3.47	88.70	2	150	1.03	6.00	152.40	1.56	2.32
17814536002	4	101.60	4.54	115.30	2	150	1.03	8.00	203.40	2.24	3.34