


PVC WATER DISCHARGE STANDARD DUTY BLUE

PVC Water Discharge Standard Duty Blue hose is an economical, standard duty water hose. This hose will not rot or mildew. Also, this hose is resistant to oils and grease and rolls flat for easy storage. It can be used in open end discharge service for water, sewage and mine acid water. This hose features a PVC construction which makes this hose lightweight and easy to handle. It won't absorb water or cake with mud.

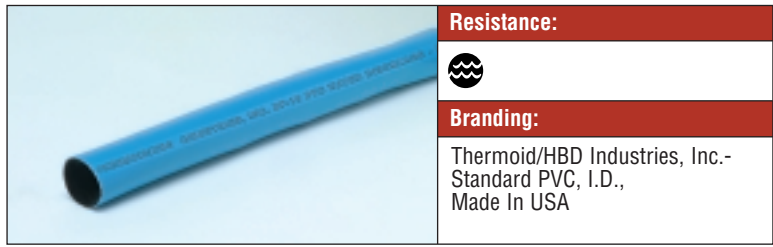

Resistance:
Branding:
Thermoid/HBD Industries, Inc.- Standard PVC, I.D., Made In USA


- Cover Color:** Blue
- Oil Resistance:** Medium
- Construction:**
 - Tube:** PVC
 - Cover:** PVC
 - Reinforcement:** 2 spiral plies and one longitudinal ply of polyester fiber
- Temperature Range:** 0°F to +150°F
-18°C to +66°C
- Packaging:** 300 ft. maximum
- Couplings:** Shank type, quick acting

Product Number	Nominal I.D.		Nominal Wall Thickness		Plies *	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
19021503002	1-1/2	38.10	0.06	1.52	2 S + 1 L	75	0.52	n/a	n/a	0.15	0.22
19022003002	2	50.80	0.06	1.52	2 S + 1 L	75	0.52	n/a	n/a	0.23	0.34
19023003002	3	76.20	0.06	1.52	2 S + 1 L	50	0.34	n/a	n/a	0.37	0.55
19024003002	4	101.60	0.06	1.52	2 S + 1 L	50	0.34	n/a	n/a	0.53	0.79
19026003002▲	6	152.40	0.06	1.52	2 S + 1 L	40	0.28	n/a	n/a	1.10	1.64

* 2 S + 1 L = 2 spiral plies plus one longitudinal ply of polyester fiber.
▲ = Make To Order (MTO)
n/a = Not Applicable

TRANSPORTER® WATER DISCHARGE

Transporter Water Discharge hose is ideal for irrigation and construction applications. This hose is extremely lightweight, flexible and easy to handle. This hose features an EPDM tube and cover which is resistant to water absorption, heat and sunlight. Regardless of the I.D., the synthetic cord reinforcement allows this hose to work at a constant working pressure of a 100 psi.

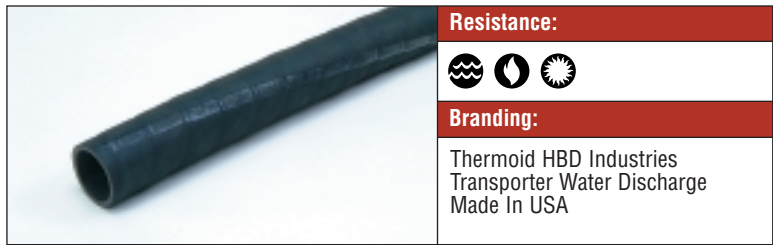

Resistance:
Branding:
Thermoid HBD Industries Transporter Water Discharge Made In USA

- Cover Color:** Black
- Oil Resistance:** Limited
- Construction:**
 - Tube:** EPDM
 - Cover:** EPDM
 - Reinforcement:** Synthetic cord
- Temperature Range:** -40°F to +180°F
-40°C to +82°C
- Packaging:** 100 ft. maximum

Product Number	Nominal I.D.		Nominal O.D.		Plies	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
17825015002▲	1-1/2	38.10	1.72	43.66	2	100	0.69	n/a	n/a	0.30	0.45
17825020002	2	50.80	2.22	56.36	2	100	0.69	n/a	n/a	0.40	0.60
17825030002	3	76.20	3.22	81.76	2	100	0.69	n/a	n/a	0.60	0.89
17825040002	4	101.40	4.22	107.16	2	100	0.69	n/a	n/a	0.90	1.34
17825060002▲	6	152.40	6.34	161.13	4	100	0.69	n/a	n/a	2.00	2.98

▲ = Make To Order (MTO)
n/a = Not Applicable