


Product information is subject to change. For full details, visit our website or contact Customer Service.

## TYPE 2458 MARINE – Black Cover

Type 2458 Marine hose is designed to handle wet marine exhaust, coupling coolant and heavy duty radiator service. This hose will also handle oily service applications. Type 2458 Marine hose is designed to fit over standard pipe. This hose features a CR tube and cover. This makes the tube resistant to hot water, antifreeze solutions and exhaust gasses when mixed with water. The cover will resist scuffing, gouging, ozone and sunlight.

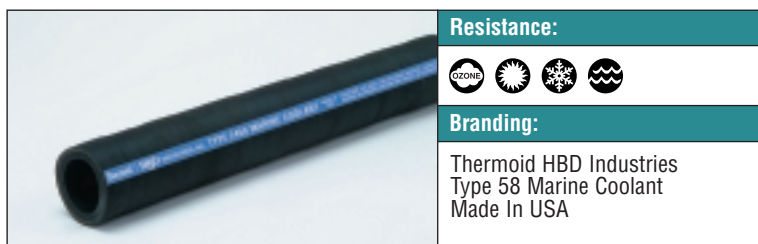

<b>Cover Color:</b>	Black
<b>Oil Resistance:</b>	Medium
<b>Construction:</b>	
<b>Tube:</b>	CR
<b>Cover:</b>	CR
<b>Reinforcement:</b>	Multiple plies of polycord
<b>Temperature Range:</b>	-40°F to +212°F -40°C to +100°C
<b>Packaging:</b>	50 ft. maximum Also available to meet SAE 20R1 Class C, standard or heavy wall construction

Product Number	Nominal I.D.		Nominal O.D.		Fits Over Pipe I.D.		Plies	Working Pressure		Min. Bend Radius		Weight	
	(inches)	(mm)	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
16245810650▲	1-1/16	26.99	1.53	38.89	3/4	19.05	3	150	1.03	n/a	n/a	0.60	0.89
16245813150▲	1-5/16	33.34	1.84	46.83	1	25.40	4	150	1.03	n/a	n/a	0.70	1.04
16245816250▲	1-5/8	41.28	2.16	54.77	1-1/4	31.75	4	150	1.03	n/a	n/a	0.90	1.34
16245818750▲	1-7/8	47.63	2.44	61.91	1-1/2	38.10	4	125	0.86	n/a	n/a	1.00	1.49
16245823750▲	2-3/8	60.33	2.97	75.41	2	50.80	4	100	0.69	n/a	n/a	1.30	1.93
16245828750▲	2-7/8	73.03	3.47	88.11	2-1/2	63.50	4	100	0.69	n/a	n/a	1.70	2.53
16245830050▲	3	76.20	3.59	91.28	—	—	4	100	0.69	n/a	n/a	1.80	2.68
16245835050▲	3-1/2	88.90	4.09	103.98	3	76.20	4	85	0.59	n/a	n/a	2.10	3.13
16245840050▲	4	101.60	4.66	118.27	3-1/2	88.90	5	75	0.52	n/a	n/a	2.60	3.87
16245845050▲	4-1/2	114.30	5.22	132.56	4	101.60	5	70	0.48	n/a	n/a	3.20	4.76
16245866212▲	6-5/8	168.28	7.19	182.56	6	152.40	4	100	0.69	n/a	n/a	2.90	4.32
16245886212▲	8-5/8	219.08	9.25	234.95	8	203.20	4	100	0.69	n/a	n/a	4.00	5.95
16245810712▲	10-3/4	273.05	11.38	288.93	10	254.00	4	100	0.69	n/a	n/a	4.90	7.29
16245812712▲	12-3/4	323.85	13.50	342.90	12	304.80	5	100	0.69	n/a	n/a	5.90	8.78

▲ = Make To Order (MTO)

n/a = Not Applicable